


Non Flammable Wire Wound Resistors

QR series High Power, Low Resistance Type

QR Type : Fixed Resistors

SQR Type : Adjustable Resistors

NQR Type : noninductive Resistors

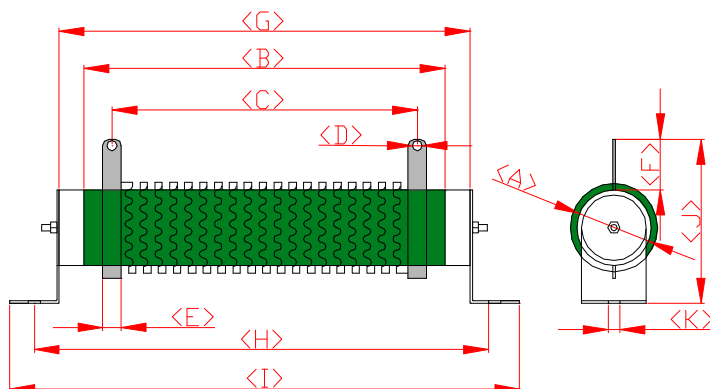

Spec.

Power Rating	Dimensions (mm)											Remark
	A±1	B±2	C±2	D±0.1	E±0.2	F±1	G±2	H±2	I±2	J±2	K±0.1	
QR- 75W	25	110	94	5.2	8	19	120	142	164	58	6	
QR- 90W	28	90	72	5.2	8	17.6	101	125	145	60	6	
QR- 120W	28	110	92	5.2	8	17.6	121	145	165	60	6	
QR- 150W	28	140	122	5.2	8	17.6	151	175	195	60	6	
QR- 180W	28	160	142	5.2	8	17.6	171	195	215	60	6	
QR- 225W	28	195	177	5.2	8	17.6	206	230	250	60	6	
QR- 240W	35	185	167	5.2	8	18	197	219	249	75	8	
QR- 300W	35	210	190	5.2	8	18	222	244	274	75	8	
QR- 375W	40	210	186	5.5	10	17.5	224	245	277	88.8	9	
QR- 450W	40	260	240.5	5.5	10	17.5	273	294	327	88.8	9	
QR- 600W	40	330	304.5	5.5	10	17.5	343	362	396	88.8	9	
QR- 750W	50	330	298	6.4	12	25.5	346	367	400	99	10	
QR- 900W	50	400	368	6.4	12	25.5	416	437	470	99	10	
QR-1000W	50	460	428	6.4	12	25.5	475	497	528	99	10	
QR-1200W	60	460	420	6.4	15	28	480	502	533	112	10	
QR-1500W	60	540	500	6.4	15	28	560	582	613	110	10	
QR-2000W	65	650	615	6.4	15	31	672	696	725	125	10	