


Non Flammable Wire Wound Resistors

R series Power Type

R Type : Fixed Resistors

SR Type : Adjustable Resistors

NR Type : Noninductive Resistors

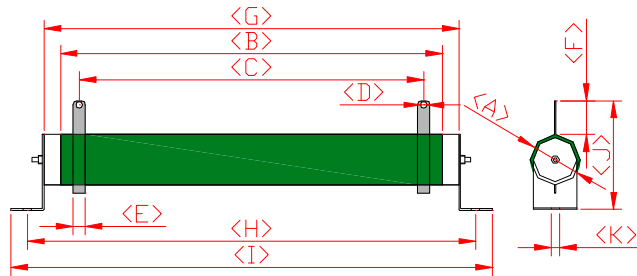

Spec.

Power Rating		Dimensions (mm)											Remark
		A±1	B±2	C±2	D±0.1	E±0.2	F±1	G±2	H±2	I±2	J±2	K±0.1	
R-	10W	12.5	45	37	2.1	4	10.5	46	53	63	28	4	
R-	20W	16.5	60	49	3	5	12	70	78	97	42	4	
R-	30W	16.5	80	69	3	5	12	90	98	117	42	4	
R-	40W	16.5	110	99	3	5	12	120	128	147	42	4	
R-	50W	25	110	94	5.2	8	19	120	142	164	58	6	
R-	60W	28	90	72	5.2	8	17.6	101	125	145	60	6	
R-	80W	28	110	92	5.2	8	17.6	121	145	165	60	6	
R-	100W	28	140	122	5.2	8	17.6	151	175	195	60	6	
R-	120W	28	160	142	5.2	8	17.6	171	195	215	60	6	
R-	150W	28	195	177	5.2	8	17.6	206	230	250	60	6	
R-	160W	35	185	167	5.2	8	18	197	219	249	75	8	
R-	200W	35	210	190	5.2	8	18	222	244	274	75	8	
R-	250W	40	210	186	5.5	10	17.5	224	245	277	88.8	9	
R-	300W	40	260	240.5	5.5	10	17.5	273	294	327	88.8	9	
R-	400W	40	330	304.5	5.5	10	17.5	343	362	396	88.8	9	
R-	500W	50	330	298	6.4	12	25.5	346	367	400	99	10	
R-	600W	50	400	368	6.4	12	25.5	416	437	470	99	10	
R-	700W	50	460	428	6.4	12	25.5	475	497	528	99	10	
R-	800W	60	460	420	6.4	15	28	480	502	533	112	10	
R-	1000W	60	540	500	6.4	15	28	560	582	613	110	10	
R-	1300W	65	650	615	6.4	15	31	672	696	725	125	10	