


Electrical Specification

Characteristics	Limits
Resistance and resistance tolerance	Resistance tolerance ±5% (J) ±10% (K)
Temperature coefficient	±400ppm/°C max.
Power rating load	$\Delta R/R \leq \pm(1\% + 0.05\Omega)$ Temperature 350°C max.
Short-time overload	1000% rated power 5 seconds $\Delta R/R \leq \pm(2\% + 0.05\Omega)$
Insulation resistance	DC500V 100MΩ min.
Dielectric withstanding voltage	AC2000V 10mA 1 minute

Electrical Curve

Power Derating Curve

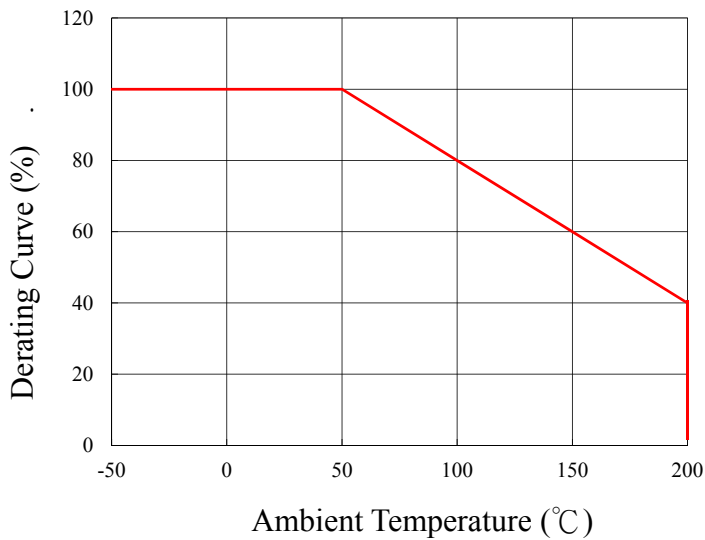

Temperature Rise

